

GPM4233 Shielded High Current Power Inductor

屏蔽大电流功率电感


Features 特点

- Flat wire windings provide extremely low DC and AC resistance.
扁平绕组提供极低的直流和交流电阻
- Low radiation noise by magnetically shielded construction
闭合磁路封装，低辐射
- Low loss ferrite cores provide flat L vs I
低损耗铁氧体磁芯提供平坦的 L 与 I
- Operating temperature : -40°C~+125°C.
工作温度：-40°C~+125°C
- Through-hole (TH) mounting for rugged board attachment
通孔 (TH) 安装，用于坚固的电路板连接
- Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)
湿气敏感度等级 (MSL) 1 (在 <30° C 时的无限车间寿命/ 85% 相对湿度)

Applications 应用

- high efficiency DC/DC converters. 高效 DC/DC 转换器
- Single and polyphase buck converters. 单相、多相降压转换器
- Filter for audio applications. 音频滤波应用
- Optimized for high current boost applications. 大电流升压应用优化

Electrical characteristics 电气特性

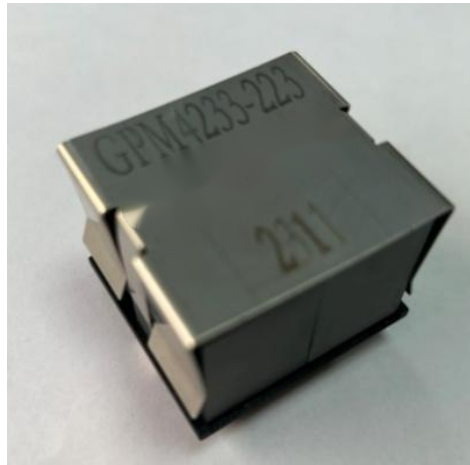

Part number 料号	Inductance① 电感量 μH±10%	DCR ② 直流电阻 mΩ		SRF③ 自谐振频率 MHz	Isat④ 饱和电流 A typ			Irms⑤ 温升电流 A max.	
		Typ	Max.		typical	10% drop	20% drop	30% drop	20°C rise 40°C rise
GPM4233-332KE	3.3	0.67	0.75	27.7	92.0	95.0	98.0	34	44
GPM4233-562KE	5.6	0.67	0.75	22.8	63.0	65.0	67.0	34	44
GPM4233-682KE	6.8	2.8	2.95	21.7	92.0	97.8	101.8	24	34
GPM4233-103KE	10	2.8	2.95	18.8	56.0	60.0	63.0	24	34
GPM4233-153KE	15	2.8	2.95	15.2	45.0	47.0	49.0	24	34
GPM4233-223KE	22	2.8	2.95	12.0	32.8	35.4	36.6	24	34
GPM4233-333KE	33	2.8	2.95	10.0	22.5	24.7	25.8	24	34
GPM4233-473KE	47	2.8	2.95	8.5	16.0	17.6	18.6	24	34
GPM4233-683KE	68	2.8	2.95	6.4	10.0	12.2	13.0	24	34
GPM4233-104KE	100	2.8	2.95	5.2	6.88	7.8	8.36	24	34
GPM4233-154KE	150	2.8	2.95	4.2	4.18	4.96	5.4	24	34
GPM4233-224KE	220	10.9	11.55	5.0	6.4	7.2	7.6	12.4	17.5
GPM4233-334KE	330	10.9	11.55	4.1	4.6	5.2	5.6	12.4	17.5
GPM4233-474KE	470	10.9	11.55	3.6	3.6	3.6	3.8	12.4	17.5

Remark

- Inductance is measured with a LCR meter Agilent 4284A or equivalent.
Test frequency at 100kHz
- DC resistance is measured with Keithley 580 Milliohm Meter, or equivalent.
Reference ambient temperature 25°C
- SRF measured using an Agilent 4395A network analyzer and an Agilent 16193A test fixture.
- DC current at 25°C that causes the specified inductance drop from its value without current.
- Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- Electrical specifications at 25°C

备注

- 电感量测试采用 Agilent 4284A 数字电桥或同等仪器；
测试频率 100KHz
- 直流电阻测试采用 Keithley 580 毫欧表或同等仪器；
环境温度 25° C
- SRF 使用 Agilent 4395A 网络分析仪和 Agilent 16193A 测试夹具测量。
- 直流电流在 25° C，加载导致指定电感从没有电流的值下降。
- 导致指定温度从 25° C 环境温度上升的电流。此信息仅供参考，不代表绝对最大额定值。
- 25° C 时的电气规格

Tel : 0769-82082731

Fax : 0769-82082732

QQ : 1067040866

E-mail : maitiandang@163.com

网址 : http://www.mtdz88.com.cn


地址 : 广东省东莞市凤岗镇雁田村长塘大道一横路1号3楼

*The specifications of the data measured in the laboratory, differ conditions of use, please refer to the actual.


*The specifications are subject to change, without prior notice.

*Without approval, this product can not be used for medical military or other high-risk areas

Dimensions 结构尺寸

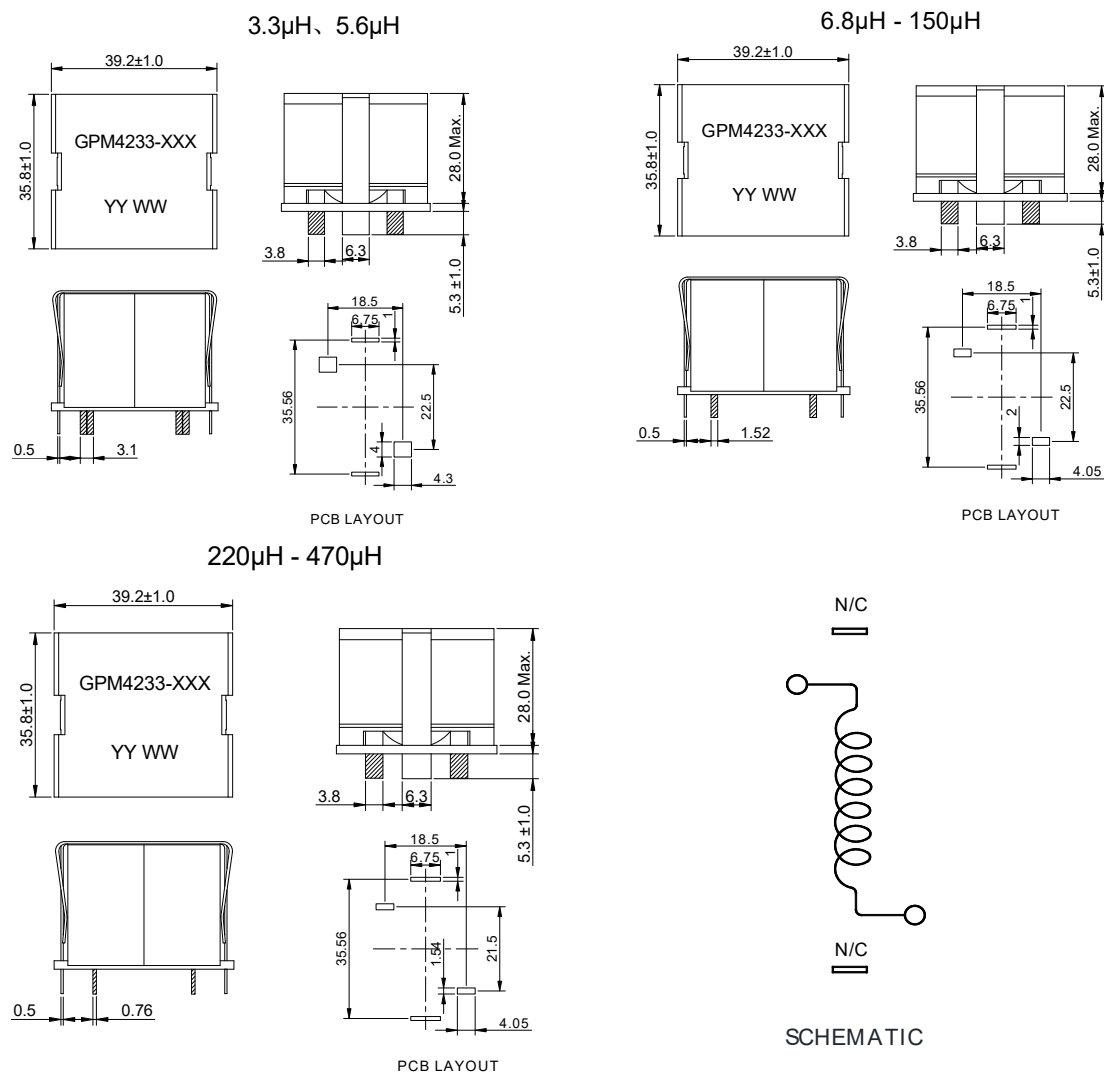


Electrical Characteristic Curve 电气特性曲线

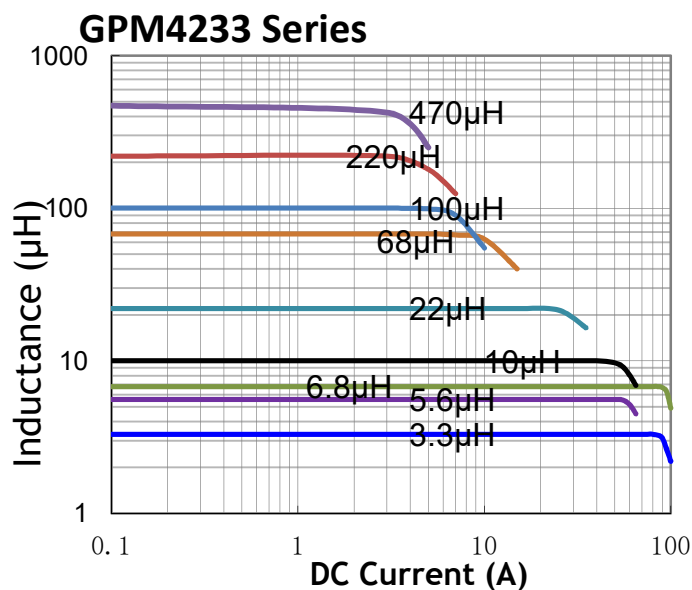

■Packaging Specification - tray: [mm]

包装规格 - 托盘包装: [mm]

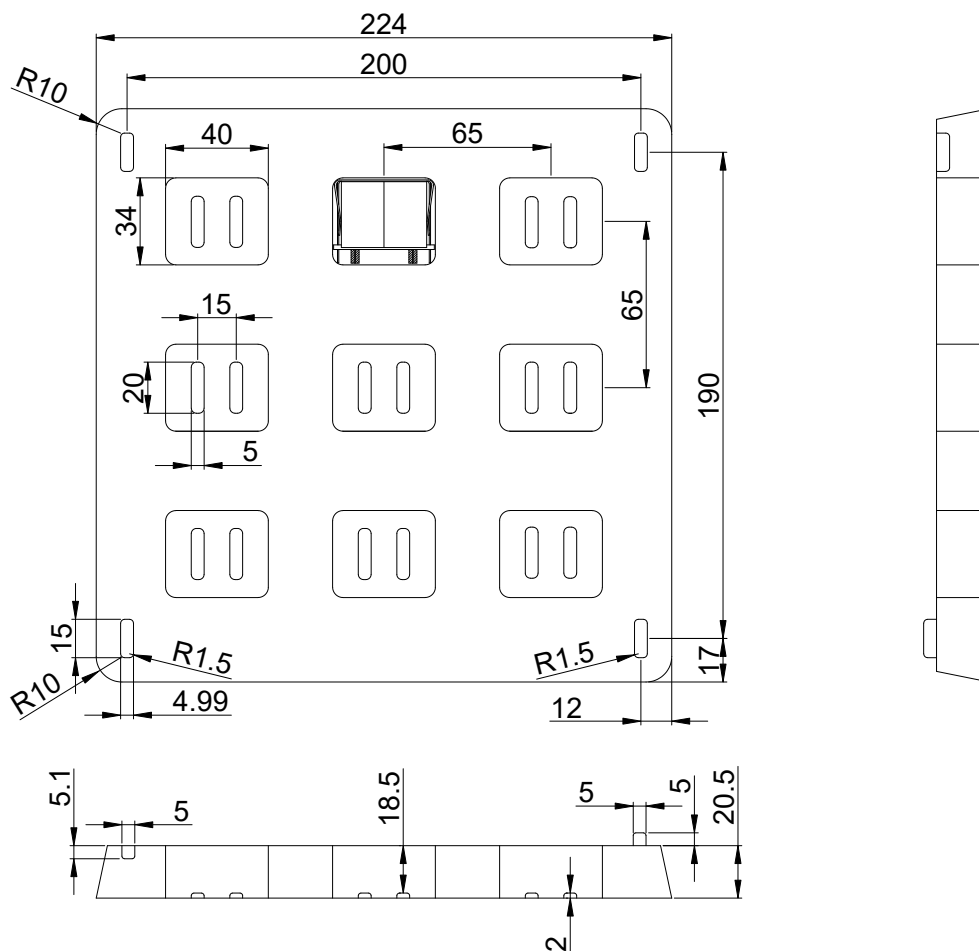

Weight 重量: 141.9~142.45g/PCS
Packaging 包装数量: 9 PCS/盘